





INSPIRED BY
EFFICIENCY

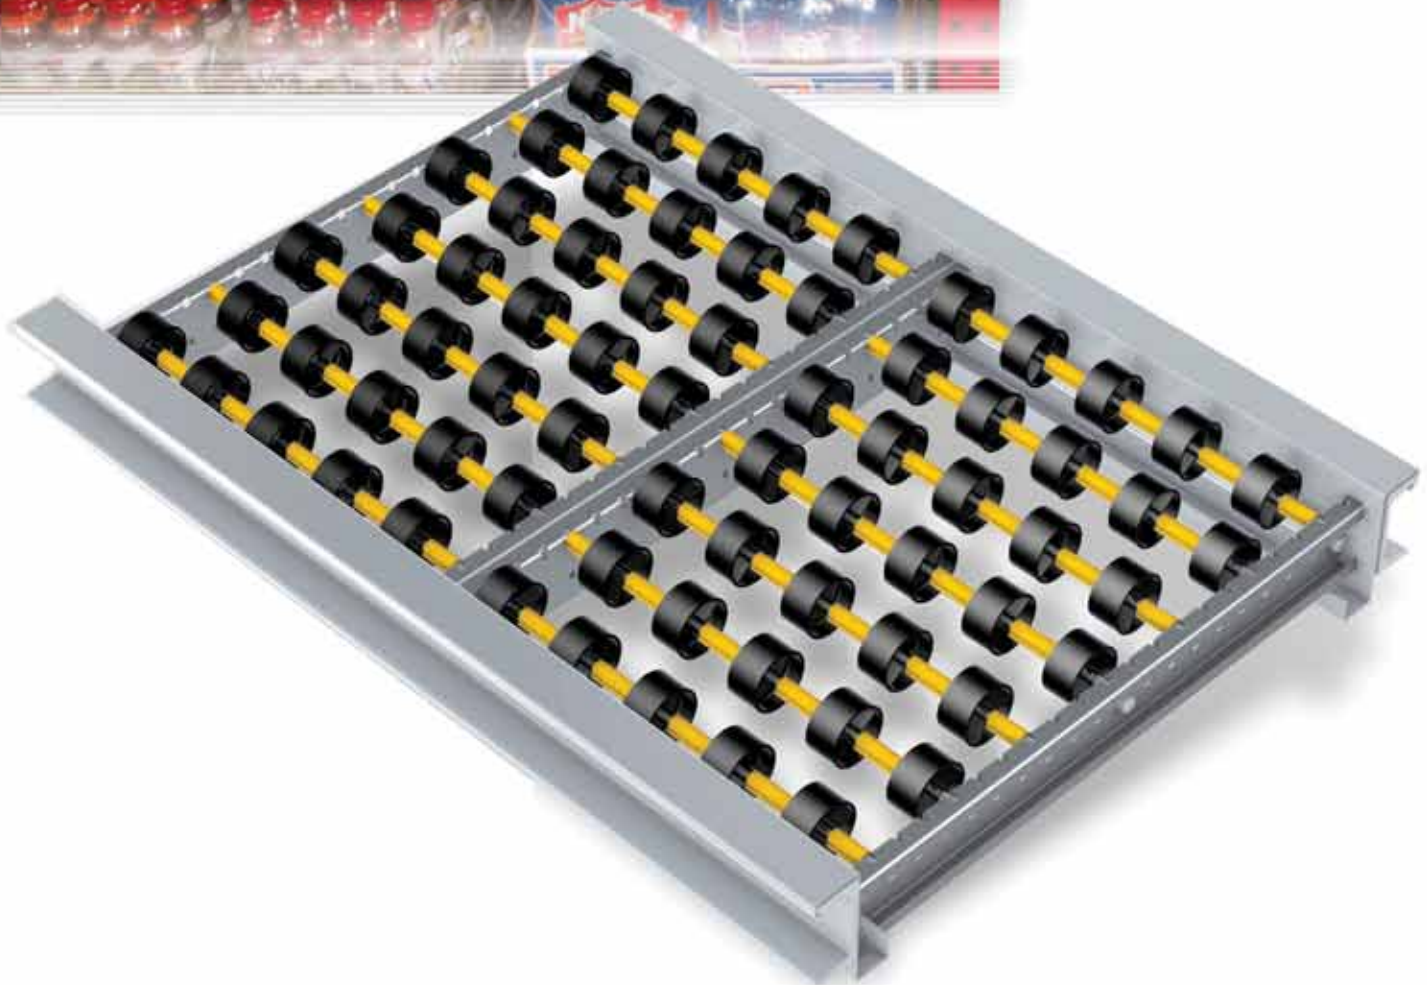

INTERROLL VERSIFLOW CARTON WHEEL FLOW

OPTIMIZE YOUR PICKING PROCESS

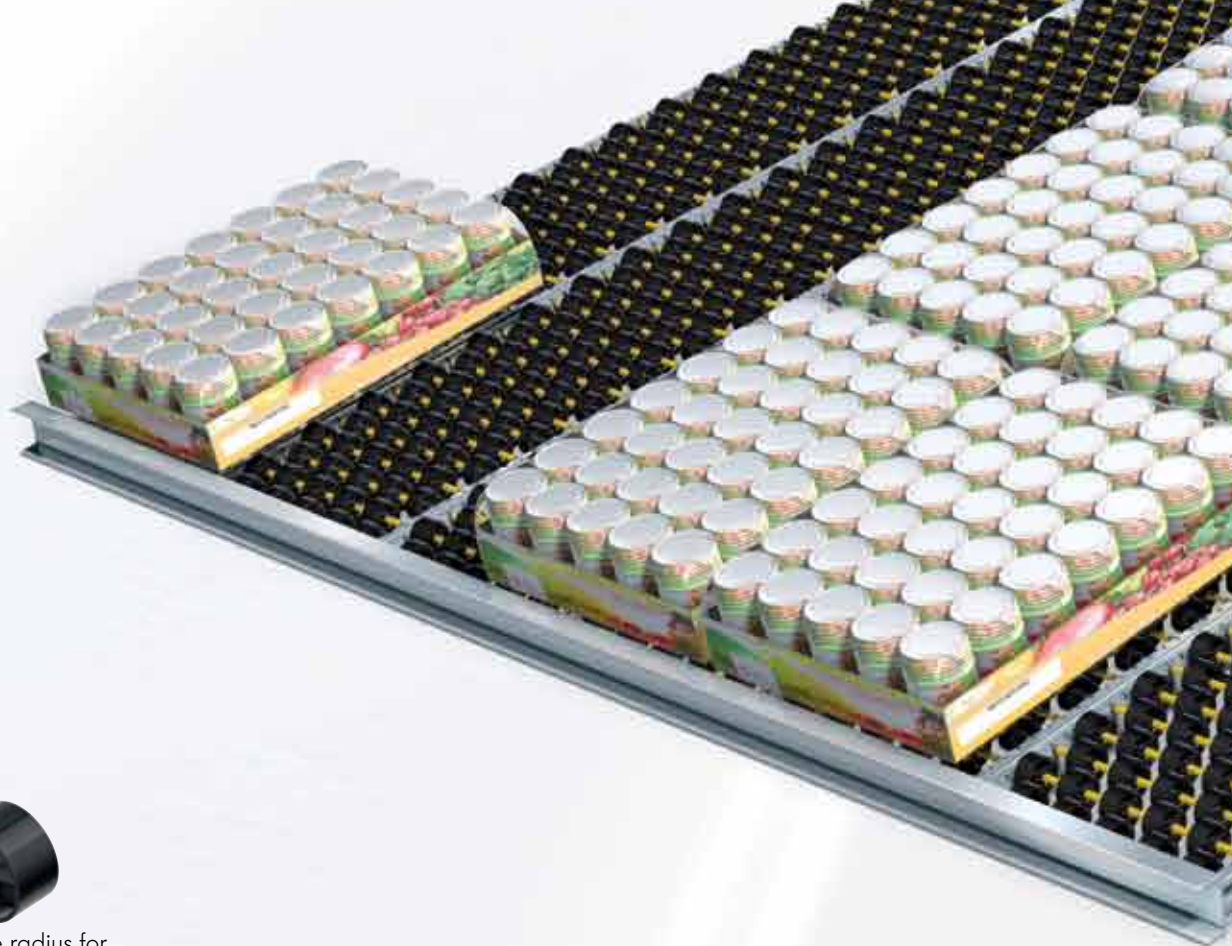

COMPONENTS

Wheels

1.9" diameter polycarbonate wheels provide a large radius for easy flowability. Wheels have a 1 inch wide rolling surface to provide excellent support for cartons or totes.




Galvanized steel axle

Galvanized steel axles on 2" or 3" centers ensure stability of load. Unit dimensions determine axle configurations.




Configurations

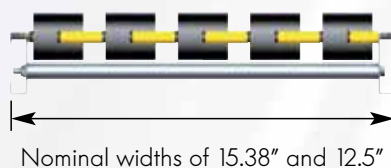

Loading side

Unloading side

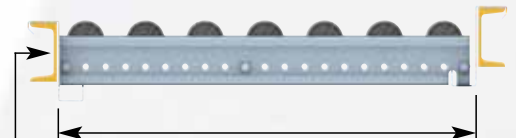


Versiflow tracks are available in any length – no splicing required even for long lengths.


Brackets are compatible with step beams, box beams, and structural beams.

Guides

Interroll offers entry guides and full length guides to help the order picker.

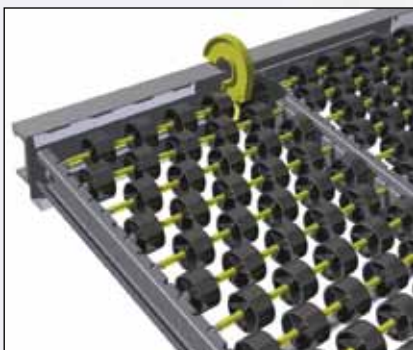


Entry guide

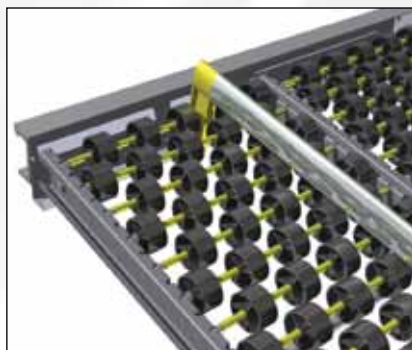

Full length guide

A 90-inch track at 15.38" or 12.5" wide can handle loads up to 500 lbs.

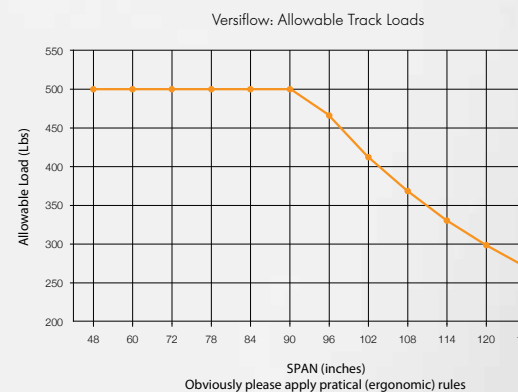





Versiflow, an economical, versatile product maximizing storage capacity and providing greater ease and speed for picking totes and cartons of varying widths.

ADAPTING EXISTING RACK

A smart investment packed with benefits brings you fast ROI!



Before – Static Racking

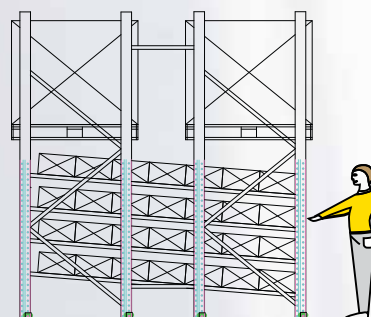

After – Interroll Versiflow

Why use Versiflow?

- Versiflow allows FIFO picking
- Versiflow offers full bay width access for various sizes of cartons or totes
- Strong polycarbonate wheels resist impact damage and provide long wear characteristics
- High density storage with up to 90% utilization of space
- Strong profile for superior load carrying over long spans
- No special tools required to install the system
- Tracks are delivered fully assembled
- Operating temperature -30°F to 104°F

to 500 lbs.





Interroll is the most global provider of core products for material handling solutions. Headquartered in Sant'Antonino Switzerland, Interroll is present in more than 30 countries.

Additional sales contacts and addresses are available by visiting www.interroll.com

North American Manufacturing Center

Interroll Dynamic Storage
Tel: 905-727-3399
ca.sales@interroll.com

Interroll Worldwide Headquarters

Interroll Holding AG
Via Gorelle 3
P.O. Box 566
CH - 6592 Sant'Antonino
Phone: +41 91 850 25 25
Fax: +41 91 850 25 55
info@interroll.com

Interroll reserves the right to modify the technical characteristics of all its products at any time.

Technical information, dimensions, data and characteristics are provided for reference only.